



keycard ca13

Make your dollar go further with these reusable access cards.

Saves you money with every ticket

- Reusable and reprintable cards are ideal to issue and reissue for contract parkers.
- Reuse as you like: reprint or peel off and replace the label each time the card is reused.

One card, many uses


- Cards can be used at multiple resorts and for complementary services such as ski business.
- Multiple applications allow you to bundle products and form valuable business partnerships.

A unique card that sets you apart

- Customize cards with your corporate ID and boost income by incorporating sponsor ads.
- Available customized at low volume – from as little as one hundred cards.

Smart features that save you money

- No need for additional printing materials such as ribbons.
- Protective laquering keeps the card looking new use after use.

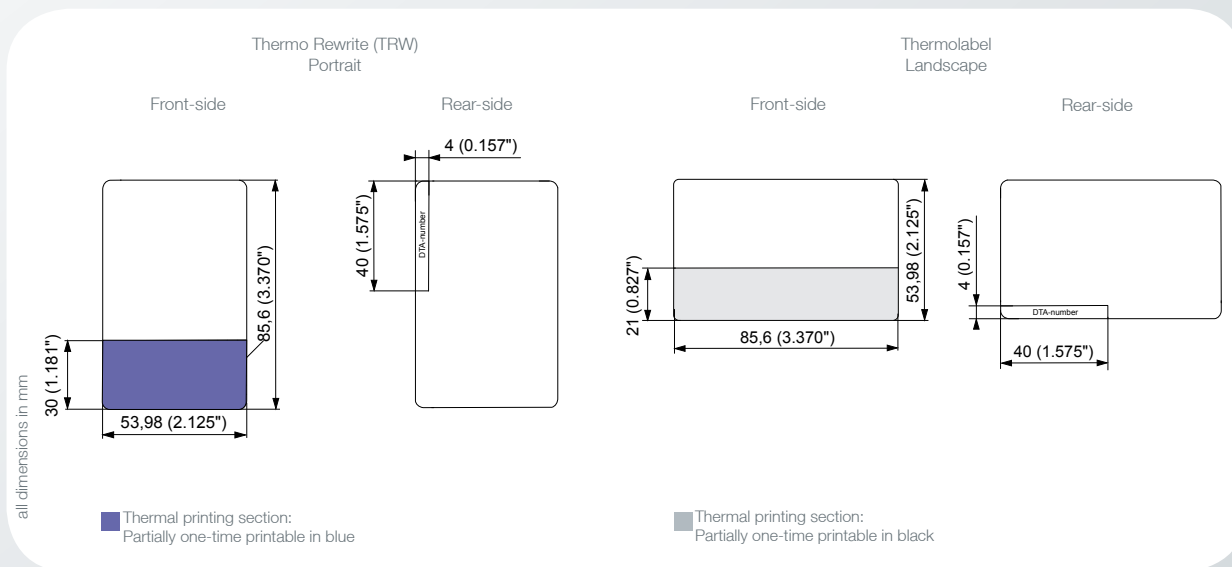

Properties

- Laminated plastic card for several years usage, heavy duty –30 °C (–22 °F)
- Manufactured in Europe
- Replaceable thermosensitive labels or Thermo Rewriteable (TRW)
- Multiple permits can be stored (Skiing, Hotel, Parking)
- Customer-specific design; four-coloured offset printing
- Single card in ISO format (cheque card format)
- Secure SKIDATA FlexSpace, plus unprotected FlexSpace
- Fraud protection at credit card level
- Supports DirectToAccess (DTA)
- Handsfree access

Standard Version

keycard ca13 Thermo Rewrite (TRW) – Portrait

- Custom design, 4-color offset printing on both sides

keycard ca13 Thermolabel – Landscape

- Custom design, 4-color offset printing on both sides

Technical Specifications	
Dimensions	53.98 mm x 85.6 mm x 0.87 mm / 2.125" x 3.370" x 0.034" (w x h x d)
Technology	RFID as per ISO15693, no batteries required
Memory management	2 permits in Secure FlexSpace +704 bits unsecured FlexSpace; Chip-ID: 01
Material	Special waterproof plastic
Surface	Scratch-resistant thanks to transparent protective coating; satin finish
Typical period of use	Several years
Fraud protection	Transaction security, password protection, data encryption
Manufacturing Quality	100 % final quality control; error rate less than 1 %
Ambient conditions	–30 °C to +50 °C (–22 °F to +122 °F); 0–100 % relative humidity
Storing conditions	In its original packaging between +5 °C and +25 °C (+41 °F and +77 °C), with a relative humidity of max. 60 %
System requirements	Parking.Logic: version 3.01.06, 4.00.06, 5.00.03 or higher; reader/coder of generation Coder Unlimited APT450.Logic: version 20.01.06, 21.00.06, 22.00.03 or higher, reader/coder of generation Coder Unlimited Freemotion.Logic: Version 17.04.07, 18.03.02, 19.03.00 or higher Devices: ASx70i DUO, Freemotion.Gate, Easy.Gate Handshake.Logic: Version 4.02 or higher Devices: ASx70i Compact V2, Freemotion.Gate, Vario.Gate